

# FCD-IP

E1/T1 or Fractional E1/T1 Access Unit with Integrated Router



Integrated access device providing bundled services over E1/T1 access lines

- Provides bundled services (data, IP, and telephony) over E1/T1 access lines
- E1/T1 uplink over copper or fiber optic media
- Operates opposite RAD's DXC cross-connect system and Megaplex access multiplexers
- Supports Frame Relay, PPP, and MLPPP

FCD-IP is an E1/T1 or fractional E1/T1 integrated access device (IAD), which enables service providers to bundle data, voice, and IP access services over a single E1 or T1 access line (see *Figure 1*).

Supported WAN services are:

- T1 or fractional T1 CSU/DSU operating at rates of up to 1.544 Mbps
- E1 or fractional E1, with or without LTU, operating at rates of up to 2.048 Mbps
- E1 or T1 over fiber optic links
- Frame Relay with auto-learn of DLCI and maintenance protocol
- ISDN BRI ("U" or "S" interface) for data services backup.



# FCD-IP

## E1/T1 or Fractional E1/T1 Access Unit with Integrated Router

An integrated router supports IP routing and transparent bridging.

An optional internal 4-port Ethernet/Fast Ethernet switch can be installed in place of LAN ports.

Internet/intranet access capabilities are enhanced through:

- **IP Service Access** authentication provided by PAP/CHAP
- **Solid Firewall** that protects an office LAN from undesired entry from the Internet
- **NAT** that allows the sharing of several legal IP addresses between the various LAN users

- **Single IP** address translation that allows a small or medium office LAN to connect to the Internet using a single dynamically or statically allocated IP address
- **DHCP** server that allows the sharing of ISP address pools between DHCP clients on the LAN.
- **OSPF** protocol based on the link state technology, distributing information about the state of links between routers.

The sub-E1/T1 or quad analog voice drop-and-insert ports provide toll-quality voice transmission. Up to three sub-E1/T1 ports can be installed in FCD-IP, aggregating three fractional E1s into one full E1 stream (see *Figure 2*).

In the ring (*Figure 3*) and daisy-chain and shared LAN applications (*Figure 4*), the first sub-E1/T1 port (sub1-E1/T1) can be used as a main link. In this case some of the E1/T1 timeslots pass through internal routers of all FCD-IP devices used in the application. The other timeslots are dropped at the user interfaces (FXS, remaining sub-E1/T1 ports etc). This enables the units to drop and insert timeslots and take routing decisions at any FCD-IP.

**Notes:** The sub1-E1/T1 port cannot be defined as a main link if FCD-IP includes a DTE data port, two LAN ports or ISDN ports.

FCD-IP connected to two LANs cannot be used in the ring applications.

The fail-safe bypass of the sub1-E1/T1 link ensures the continuity of voice services in case of power supply failures. The bypass is not available for the fiber optic main links.

ISDN or PSTN backup, using an external dial-up modem, ensures the continuity of data services.

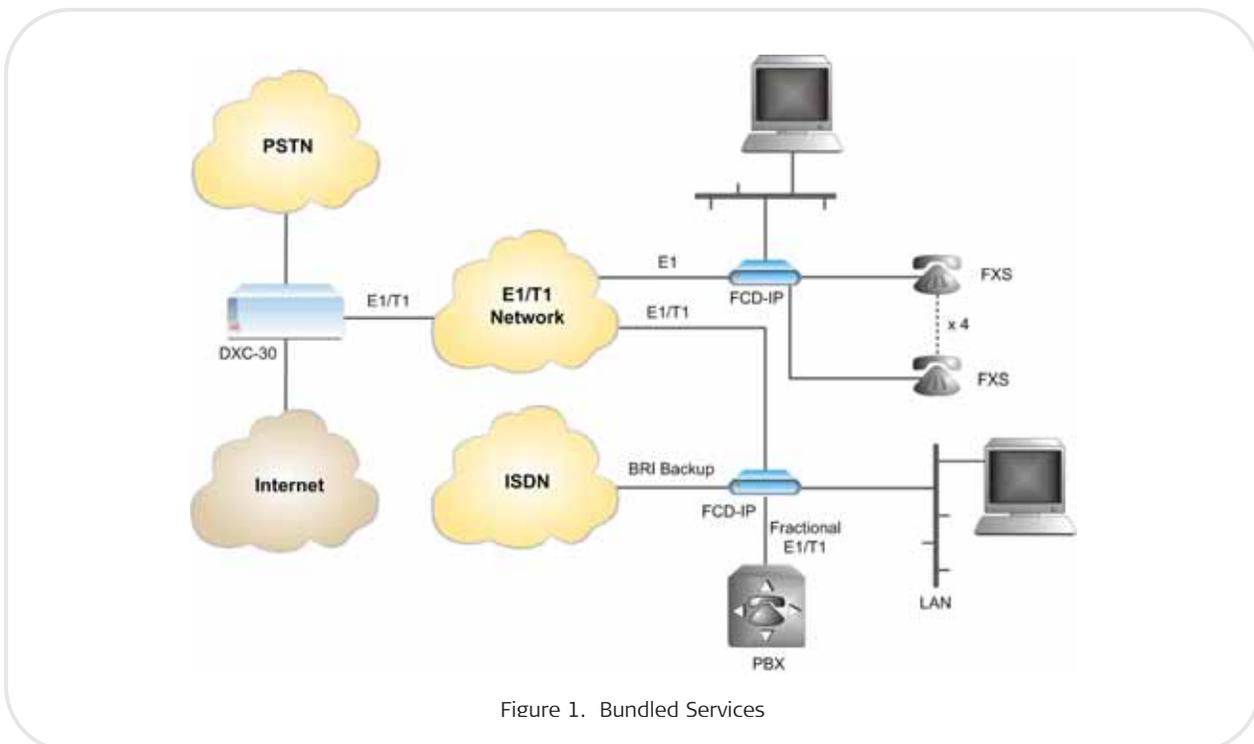


Figure 1. Bundled Services

An optional data port can be utilized either as a second serial router port or as a transparent  $n \times 64$ ,  $n \times 56$  data port for connecting legacy equipment.

The unit can be easily configured through a quick setup menu using a terminal attached to the control port or by Telnet access over the LAN/WAN.

FCD-IP features a variety of inband and out-of-band management options. These options include dedicated timeslot, dedicated DLCI and dial-in.

The SNMP agent provides management by RADview or any other standard SNMP management station.

Undesired access to FCD-IP via Telnet or SNMP can be blocked or password protected.

The dual-level management authentication allows user access to router configuration parameters, while restricting user access to network configuration parameters.

Software download is available via the control port using XMODEM and via LAN/WAN using TFTP.

Parameter file download and upload is available via LAN or WAN using TFTP.

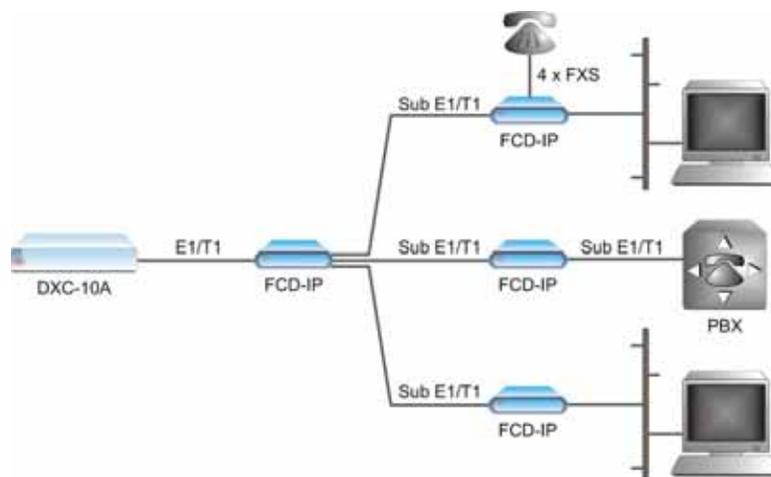


Figure 2. Aggregating Three Fractional E1 Links into One Full E1 Link

# FCD-IP

## E1/T1 or Fractional E1/T1 Access Unit with Integrated Router

### Specifications

#### E1 INTERFACE

**Framing**

G732N (no MF, CCS)  
G732N (no MF, CCS) with CRC-4  
G732S (TS16 MF, CAS)  
G732S (TS16 MF CAS) with CRC-4

**Bit Rate**

2.048 Mbps

**Line Code**

AMI

**Zero Suppression**

HDB3

**Impedance**

120Ω, balanced  
75Ω, unbalanced

**Signal Level**

Receive:

0 to -36 dB with LTU  
0 to -12 dB without LTU

Transmit:

3V (±10%), balanced  
2.37V (±10%), unbalanced

**Jitter Performance**

As per ITU G.823

**Connectors**

RJ-45, balanced or two BNC coaxial,  
unbalanced (via adapter cable)

**Compliance**

ITU G.703, G.704, G.706, G.732

**Diagnostics**

User-activated local and remote loopbacks

#### T1 INTERFACE

**Framing**

D4, ESF

**Bit Rate**

1.544 Mbps

**Line Code**

AMI

**Zero Suppression**

Transparent, B7ZS, B8ZS

**Impedance**

100Ω, balanced

**Signal Level**

Receive:

0 to -36 dB with CSU  
0 to -15 dB without CSU

Transmit:

0, -7.5, -15, -22.5 dB with CSU  
Soft adjustable at 0 to 655 ft, without  
CSU

**Jitter Performance**

As per AT&T TR-62411

**Connector**

RJ-45 8-pin, balanced

**Compliance**

AT&T TR62411, ANSI T1.403

**Diagnostics**

User activated local and remote loopbacks  
Network activated loopbacks and FDL  
loopbacks (RLB, LLB)

#### ANALOG VOICE INTERFACE

**Number of Channels**

Four

**Modulation Method**

PCM (per ITU-T G.711 and  
AT&T PUB-43801), μ-Law or A-Law

**INTERFACES****E&M:**

2-wire or 4-wire, supporting different types of E&M signaling: RS-464 Types I, II, III and V, and BT SSSDC5, software-configured

**FXS:**

Loop start, WINK start (reverse polarity) for direct connection to a 2-wire telephone, CID (Caller ID) support

**FXO:**

Loop start, WINK start (reverse polarity) connection to a 2-wire telephone exchange subscriber line

Nominal level: 0 dBm

Nominal impedance: 600Ω

Return loss: (ERL), better than 20 dB

Frequency response (Ref: 1020 Hz):

±0.5 dB, 300 to 3000 Hz

±1.1 dB, 250 to 3400 Hz

Signal to total distortion, G.712, G.713 method 2:

0 to -30 dBm0, better than 33 dB

+3 to -45 dBm0, better than 22 dB

Idle channel noise: Better than -70 dBm0 (+20 dBnc)

Transformer isolation: 1500 VRMS

**DIAGNOSTICS**

Local digital loopback towards the analog side

Remote analog loopback towards the remote side, activated from the local side

1 kHz tone injection towards the analog side

**Connectors**

E&M: RJ-45, 8-pin

FXS, FXO: RJ-11, 6-pin

**ISDN INTERFACE****Interface**

ISDN BRI, "S" and "U"

**Compliance**

ETS 300012, I.430, NTT, 5ESS, DMS-100, NI1

Table 1. Fiber Optic Interface Characteristics

Wavelength	Fiber Type	Transmitter Type	Power	Receiver Sensitivity	Typical Max. Range	
[nm]	[μm]		[dBm]	[dBm]	[km]	[miles]
850	62.5/125 multimode	VCSEL	-18	-38	5	3
1310	9/125 single mode	Laser	-12	-39	62	38
1550	9/125 single mode	Laser	-12	-39	100	62

# FCD-IP

## E1/T1 or Fractional E1/T1 Access Unit with Integrated Router

### LAN INTERFACE

#### Number of Ports

1, 2, or 4

#### Compliance

IEEE 802.3

#### Type

Single 10/100BaseT (RJ-45) port  
Dual 10BaseT (RJ-45)  
4-port 10/100BaseT (RJ-45) switch

### DATA PORT INTERFACE

#### Type and Connectors

RS-232/V.24 or RS-530 with 25-pin  
D-type, female

RS-422/V.36 with 37-pin D-type, female

V.35 with 34-pin female

X.21 with 15-pin D-type, female

**Note:** All synchronous data ports are equipped with 25-pin D-type, female connectors. Adaptor cables for the V.35, V.36 and X.21 interfaces are supplied with the unit.

### FIBER OPTIC INTERFACE

#### Types

See *Table 1*

#### Compliance

ITU G.921, G.955 (11/1996)

### WAN PROTOCOLS

#### Type

Frame Relay - RFC 1490  
PPP and MLPPP

### ROUTING

#### Types

STATIC, RIP-I, RIP-2, RIP/SAP, OSPF

#### ARP Table

Up to 300 MAC addresses

### GENERAL

#### Power

AC: 100 to 240 VAC ( $\pm 10\%$ ), 50 to 60 Hz,  
13 VA max

DC: -24 to -48 VDC, 13W

#### Physical

Height: 4.4 cm (1.8 in) (1U)

Width: 21.6 cm (8.5 in)

Depth: 24.0 cm (9.4 in)

Weight: 1.1 kg (2.5 lb)

#### Environment

Temperature: 0°C to 50°C (32°F to 122°F)

Humidity: Up to 90%, non-condensing

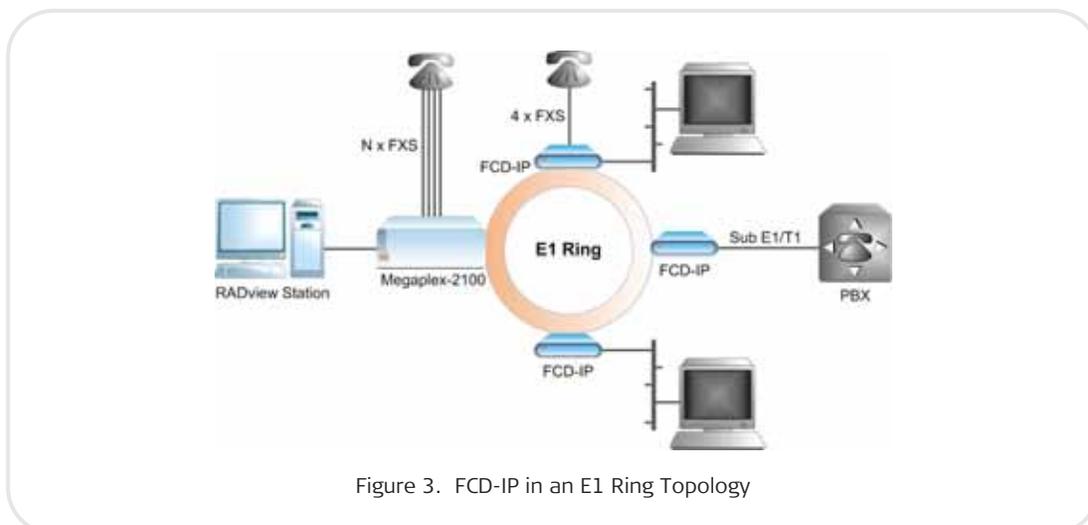


Figure 3. FCD-IP in an E1 Ring Topology

## Ordering

### STANDARD CONFIGURATIONS

FCD-IP/DC/E1/U/S

FCD-IP/E1/U

FCD-IP/DC/E1/FC13L/U/E&M

FCD-IP/E1/4U/FXS

FCD-IP/E1/U/S

### SPECIAL CONFIGURATIONS

FCD-IP/~/\$/+/\*

E1/T1 or fractional E1/T1 access unit with integrated router

#### Legend

~ DC power supply (Default=AC power supply):

**DC** -20 to -72 VDC

*Note: FCD-IP with FXS, FXO and E&M voice interfaces cannot work with -24 VDC voltage within the DC power supply range.*

\$ Primary WAN interface with optional second data port:

**E1/#** E1 or fractional E1 (RJ-45 only)

**T1/#** T1 or fractional T1

**E1/?/!/#** E1 or fractional E1 with built-in fiber optic modem

**T1/?/!/#** T1 or fractional T1 with built-in fiber optic modem

*Note: The T1 line cannot be used for a ring application.*

- # Optional second WAN interface:
  - V24T** V.24/RS-232 (DTE)
  - V35T** V.35 (DTE)
  - 530T** RS-530 (DTE)
  - V36T** V.36/RS-422/RS-449 (DTE)
  - X21T** X.21 (DTE)
- or
- Serial port interface:
  - V24C** V.24/RS-232 (DCE)
  - V35C** V.35 (DCE)
  - 530C** RS-530 (DCE)
  - V36C** V.36/RS-422/RS-449 (DCE)
  - X21C** X.21 (DCE)

*Note: All synchronous data ports are equipped with 25-pin D-type, female connectors. Adapter cables for the V.35, V.36, and X.21 interfaces are supplied with the unit.*

? Fiber optic connector:

**ST** ST connector

**FC** FC/PC connector

**SC** SC connector

! Wavelength and type:

**85** 850 nm, multimode, VCSEL

**13L** 1310 nm, single mode laser diode

**15L** 1550 nm, single mode laser diode

+ LAN interface:

**U** 10/100BaseT (UTP)

**2U** 2 × 10BaseT (UTP)

**4U** 4 × 10/100BaseT (UTP) built-in switch

- \* Optional sub-E1/T1, analog voice or ISDN backup interfaces:
  - S** sub-E1/T1 port (RJ-45 only)
  - 2S** 2 sub-E1/T1 ports (RJ-45 only)
  - 3S** 3 sub-E1/T1 ports (RJ-45 only)
  - FXS** 4 FXS voice channels
  - FXO** 4 FXO voice channels
  - E&M** 4 E&M voice channels
  - IBE** ISDN "S" interface
  - IBU** ISDN "U" interface
  - FXS/S** 4 FXS voice channels and one sub-E1/T1 port
  - FXO/S** 4 FXO voice channels and one sub-E1/T1 port
  - E&M/S** 4 E&M voice channels and one sub-E1/T1 port
  - IBE/S** ISDN "S" interface and one sub-E1/T1 port
  - IBU/S** ISDN "U" interface and one sub-E1/T1 port

*Notes: 1. The second WAN option is not available when configuring E1/T1 with an ISDN backup.*

*2. The dual LAN configuration is not available when configuring E1/T1 with an ISDN backup.*

*3. The line cannot be fiber for options 3S, FXS/S, FXO/S, E&M/S, IBE/S, or IBU/S.*

*4. 3S (3 sub-E1/T1 ports) cannot be installed with an additional FXO, FXS, E&M, IBE, or IBU.*

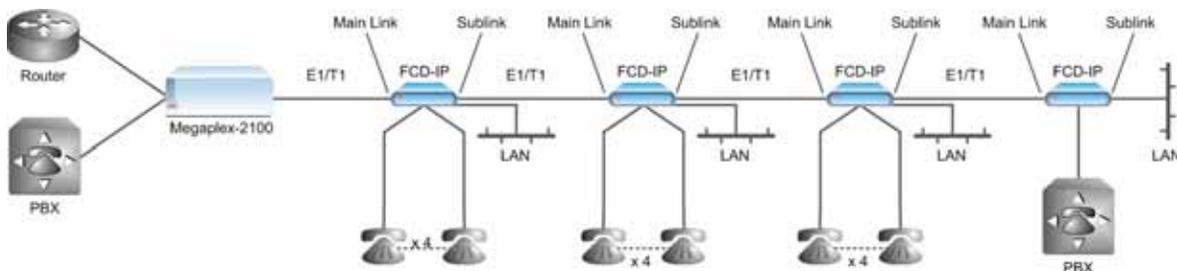


Figure 4. Daisy-Chain and Shared LAN Topology

## FCD-IP

## E1/T1 or Fractional E1/T1 Access Unit with Integrated Router

## SUPPLIED ACCESSORIES

Power cord

DC power connection kit (when DC power supply is ordered)

**CBL-RJ45/D9/F/6FT**

Control port cable

When V.35, V.36, or X.21 interfaces are ordered, adaptor cables are supplied with the unit.

## OPTIONAL ACCESSORIES

**CBL-RJ45/2BNC/E1**

Interface cable for converting a balanced E1 RJ-45 connector into a pair of BNC unbalanced coaxial connectors

**RM-17**

Hardware kit for mounting one or two FCD-IP units into a 19-inch rack

Table 1. Comparison Table

Features	FCD-IP 	FCD-IPM 
Total user ports	Up to 11	Up to 19
Interface types	X.21, V.35, V.24, RS-530, E1/T1, E&M, FXS, FXO, ISDN, SHDSL, ETH	X.21, V.35, V.24, RS-530, E1/T1, E&M, FXS, FXO, ISDN, SHDSL, ETH
E1/T1 line type	✓	✓
SNMP management	✓	✓
Interoperability	✓	✓
E1 bypass	✓	✓
ETH performance	10/100 MB/s	10/100 MB/s

**International Headquarters**

24 Raoul Wallenberg Street  
Tel Aviv 69719, Israel  
Tel. 972-3-6458181  
Fax 972-3-6498250, 6474436  
E-mail market@rad.com

**North America Headquarters**

900 Corporate Drive  
Mahwah, NJ 07430, USA  
Tel. 201-5291100  
Toll free 1-800-4447234  
Fax 201-5295777  
E-mail market@rad.com

[www.rad.com](http://www.rad.com)

Order this publication by Catalog No. 801764



**data communications**

The Access Company